

UpRight

MB20/20N/26

mast booms

vertical articulated lifts



Working heights to 8 m or 10 m

Working outreach to 3 m

Platform capacity for
2 people and tools

Articulating jib

360° mast rotation

One-hand proportional control

Compact dimensions on MB20N
810 mm wide


300 mm inside
turning radius

Driveable while fully elevated

Hydraulic depression mechanism


Non-marking tyres

25% Gradeability

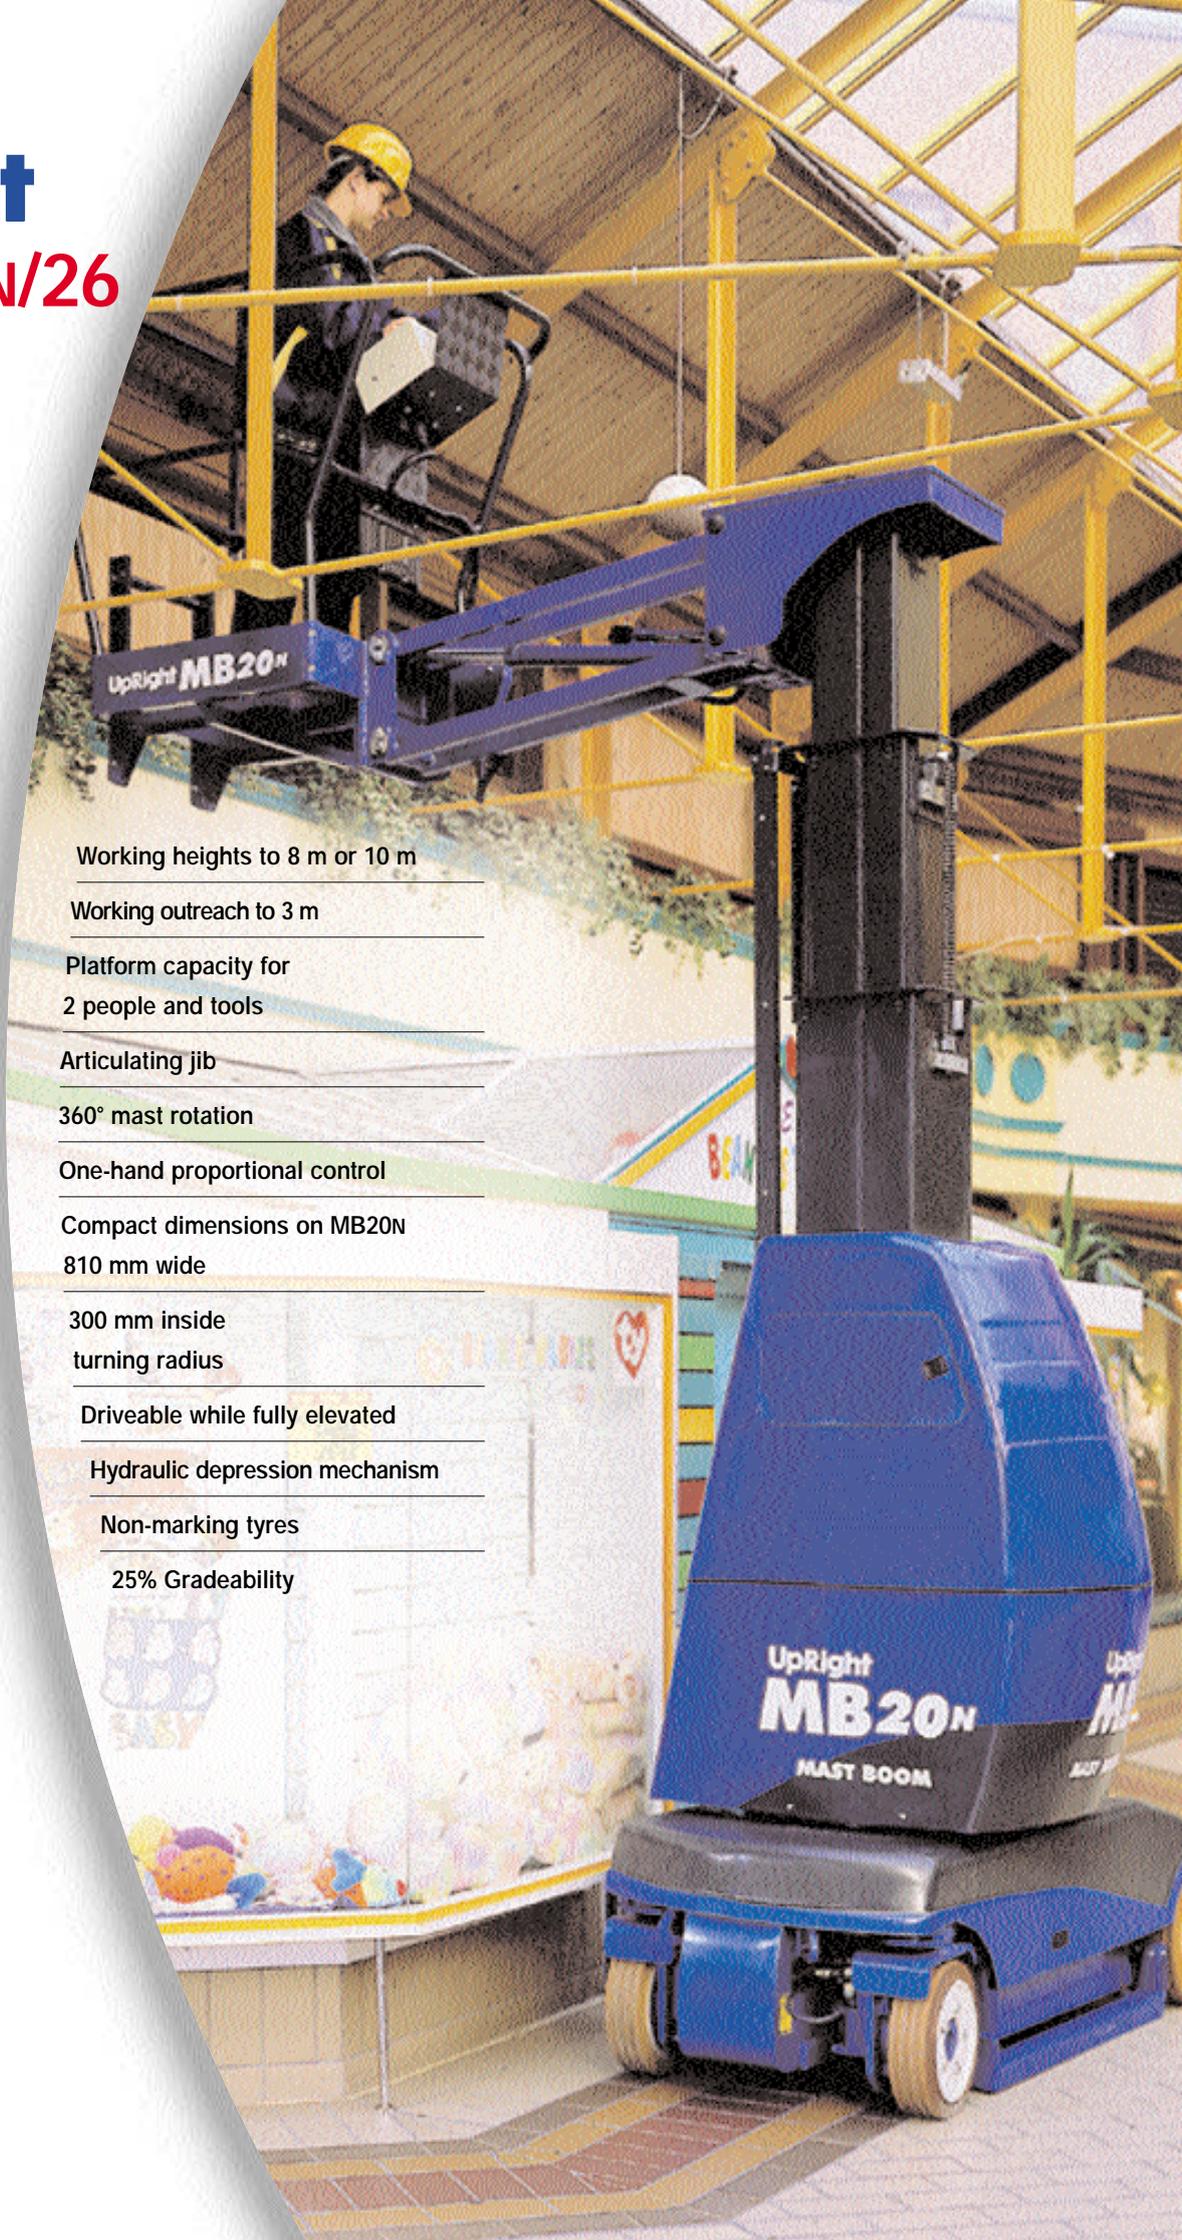

specifications	MB20N	MB20	MB26
platform height (max.) A	6 m	6 m	8 m
working height (max.) B	8 m	8 m	10 m
working outreach (max.)	2.13 m	2.13 m	3 m
drive height (max.)	fully elevated	fully elevated	fully elevated
platform capacity	215 kg	215 kg	215 kg
platform size	0.78 m x 0.73 m	0.78 m x 0.73 m	0.78 m x 0.73 m
stowed height C	1.98 m	1.98 m	1.98 m
length D	2.2 m	2.2 m	2.8 m
width E	0.81 m	0.99 m	0.99 m
gross weight	2,570 kg	2,172 kg	2,672 kg
drive speed - stowed	3.0 km/h	3.0 km/h	3.0 km/h
- elevated	0.7 km/h	0.7 km/h	0.7 km/h
inside turning radius	0.3 m	0.3 m	0.3 m
outside turning radius	1.85 m	2.1 m	2.1 m
tail swing	250 mm	140 mm	140 mm
jib arc	138 degrees	138 degrees	138 degrees
mast rotation	360° (non-continuous)	360° (non-continuous)	360° (non-continuous)
gradeability	14 degrees	14 degrees	14 degrees
control system	smooth, one-hand proportional controller		
power source	4 x 6V x 375 Ah batteries	4 x 6V x 375 Ah batteries	4 x 6V x 375 Ah batteries

Specifications subject to change without notice. Photos and diagrams in this brochure are for promotional purposes only. Refer to appropriate UpRight Operator's manual for detailed instructions on the proper use and maintenance of this equipment.



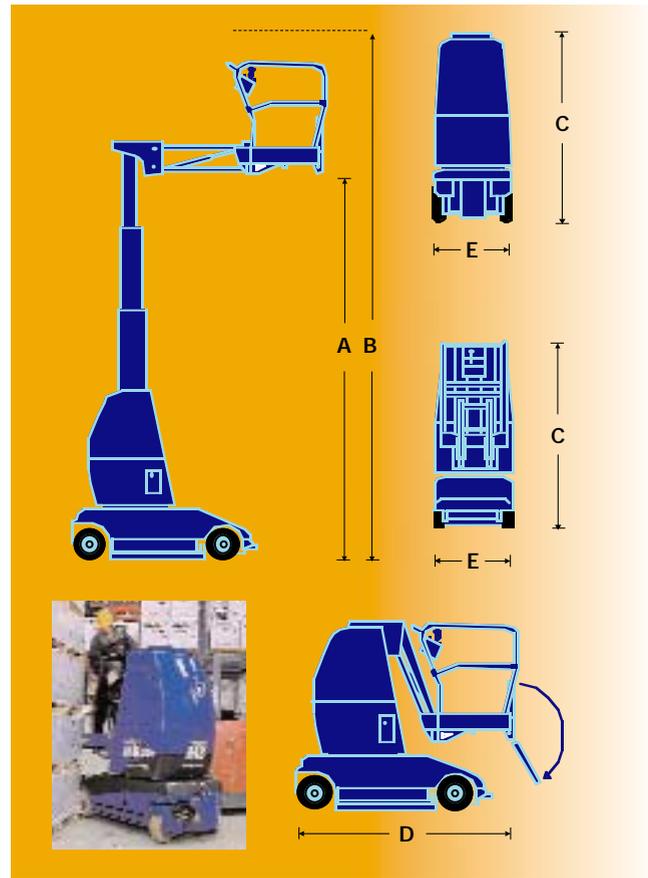


standard features

- Proportional one-handed controller
- Ultra-tight inside turning radius
- Tilt alarm
- Two person basket
- Rated for outdoor use
- Solid non-marking tyres
- Ground control station
- Self-seeking automatic charger with line contactor allowing AC/DC operation
- CE compliance
- Automatic battery top up
- 5 year structural warranty

options

- Flashing amber beacon
- Power to platform (220V or 110V)

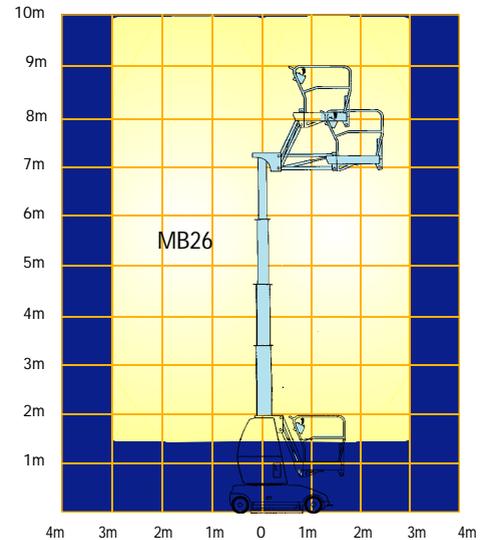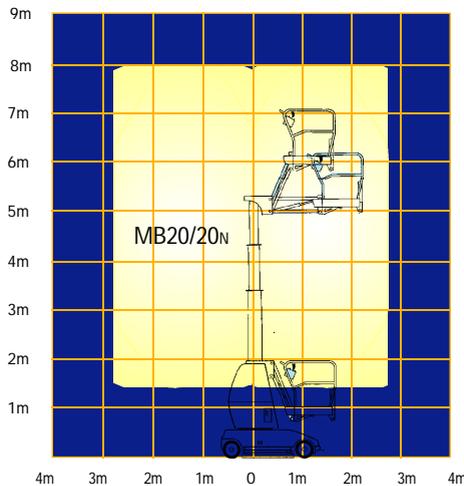

manufactured by
UpRight